

# MULTIPIPE

## Fortis ECO Under Floor Heating

### Technical Data Sheet

#### Product Detail


Fortis ECO is an expanded polystyrene board (EPS), fitted with a bonded 450 Micron foil that even goes into the grooves this acts as the emitter for the pipework system. The large 1200x1200mm panel size means they are lightweight and quicker to lay. Thanks to the service we offer on the pipe centres and hights, this system is ideal for a system with different floor heights. Please note that in all cases, a minimum 18mm T&G chipboard is required over the top.

#### Benefits

- Lightweight, easy to lay
- ideal for overboarding
- Variable pipe centres on request
- Variable thicknesses on request.

#### Features

- Pre-routed routes for 16mm pipe
- large 1200x1200mm sheet size
- easy to cut 45-micron foil fully applied
- All-in-one panel design (no feed and return panels)

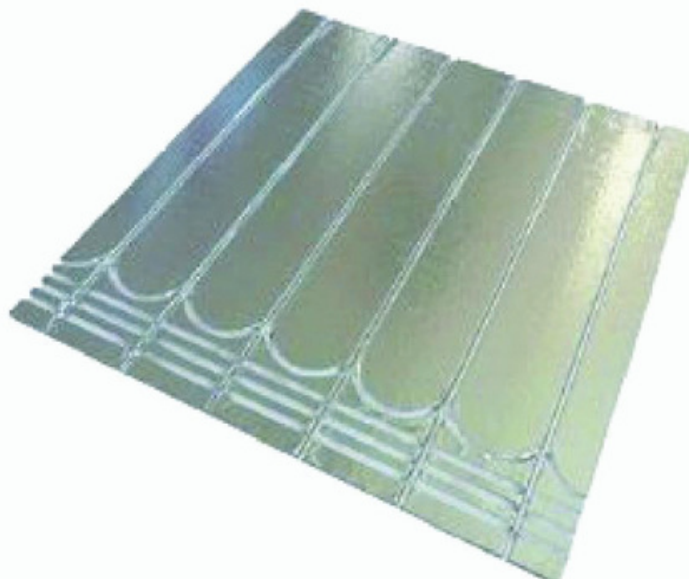

Underfloor Heating

Product Code (panel only)	23-11215
Panel Dimension	1200mm x 1200mm
Useable Area per Board	1.44m <sup>2</sup>
Standard Panel Height	25mm
Pipe Diameter	16mm
Standard Pipe Spacing	200mm
Compressive strength	100kPa
Foil Thickness	45 Micron
System weight : (inc. pipe + water excl. floor covering)	1.4 kg/m <sup>2</sup>

#### Supplementary Products

