


MAXIMA LS MANIFOLD

44-061xx

PRODUCT DETAIL

Made from high-quality stainless steel with premium brass components, the Maxima LS manifold features a patented profile that is unique to the UK market. Its increased bore size allows for up to 16 ports while maintaining a compact overall profile.

All Maxima LS manifolds come complete with integrated fill and drain points, with individual radiators that can be balanced at the manifold thanks to integrated valve on each port. Every manifold is quality-checked and pressure-tested before leaving the factory, ensuring consistent quality and reliability. Manufactured in an ISO 9001- and ISO 14001-certified facility, the Maxima LS manifold delivers a combination of performance, quality, and durability.

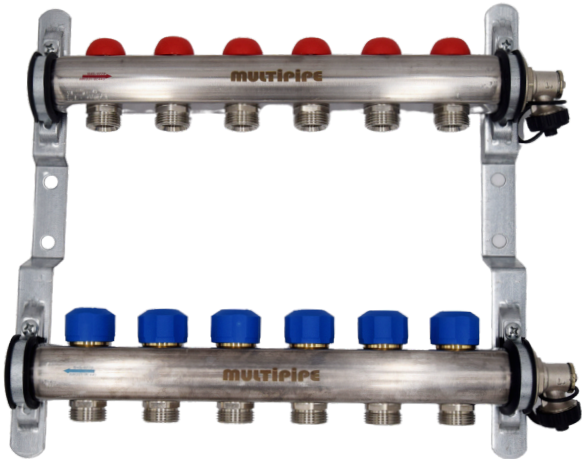

BENEFITS

- 43% bigger bore
- Over 40% cost savings on larger manifolds
- Halve your labour time by using a larger manifold

FEATURES

- Premium and quality components
- Fill & Drain Points
- Integrated lockshield valve per port
- Reversible

PRODUCT CODE	44-061xx
PORTS	2-16 ports
MATERIAL BODY	1.4301 stainless steel
MANIFOLD CONNECTION	EN 16313 3/4" Eurocone
MAXIMUM TEMPERATURE	60°C
MAXIMUM PRESSURE	6 Bar
ACTUATOR PIN SPRING POWER (CLOSED)	40N
FLOWMETER	0-5 L/min
THREAD SIZE	1" Female thread
ACTUATOR THREAD SIZE	M30 x 1.5mm


SUPPLEMENTARY PRODUCTS



MAXIMA LS MANIFOLD

44-061xx

DIMENSIONS

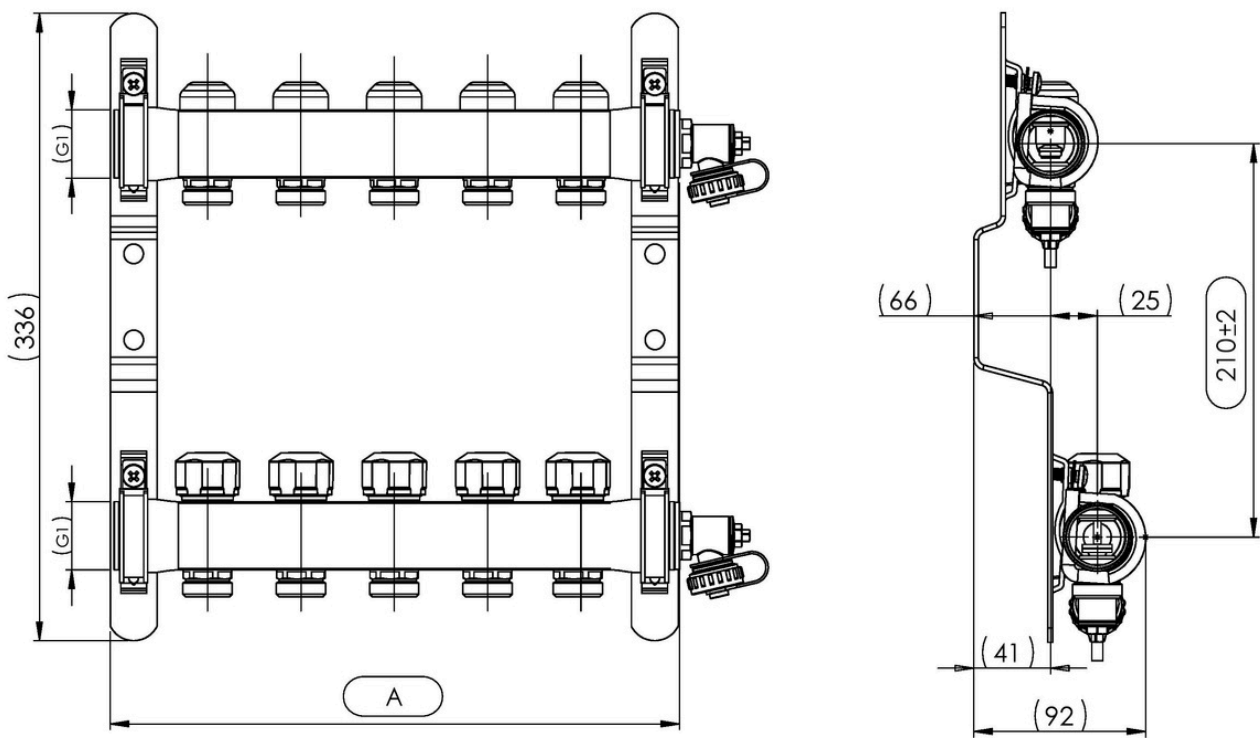

PORTS	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
A DIMENSION (MM)	195	245	295	345	395	445	495	545	595	645	695	745	795	845	895

**all dimension exclude valves, pump sets and working area around the manifold.*