

TACKER UNDERFLOOR HEATING SYSTEM

PRODUCT DETAIL


Multipipe Tacker UFH system is the most popular type of UFH system normally supplied as part of a new build construction on the ground floor. Supplied with our MLC pipe, the pipework is directly stapled to the insulation board of the main construction. Then either a 4:1 sand cement screed (typically) is added, but other screeds can be used, including Gyvlon Thermio Screed, the only BBA certified screed. Thanks to its unique makeup, it can be laid as low as 40mm. All insulation should be fitted in line with part L of the building regulations or at least to BS EN 1264 standard of 1.25 m²K/W.

BENEFITS

- The most cost-efficient UFH system
- incorporates into a standard build construction
- Variable pipe centres can be used for better outputs
- Tacker staple are easily applied with a tackler gun
- Perfect system for renewable heat sources

EDGE INSULATION

PRODUCT CODE	10-50150
PRODUCT SIZE	150mm x 8mm
PRODUCT LENGTH	25m, 50m
APRON	Yes, Bonded @ 75mm
CUTS	Precut 10mm in 5 sections
THERMAL CONDUCTIVITY	0.038 W/mK
WATER ABSORPTION	0.02-0.03 mg/cm ²
ENVIRONMENTAL	0% VOC's & CFC's GWP<5

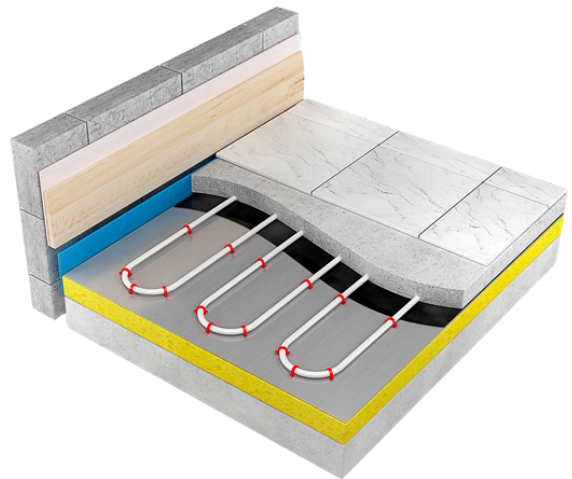

FEATURES

- 2 staple sizes available for different thickness insulation
- Edge insulation incorporates an apron for flowing screed use
- MLC pipe allow of easier and better quality installs

PIPE CLIPS

PRODUCT CODE 40MM	10-16304x (Blue)
PRODUCT CODE 60MM	10-16306x (Red)
RECOMMENDED CLIPS PER M	2x for MLC Pipe 3x For Plastic Pipe
SUITABLE PIPE DIA.	15-20mm
MATERIAL	Polypropylene
MAGAZINE SIZE	30 Pce.
MAGAZINE FIXMENT	Thermoweld

SUPPLEMENTARY PRODUCTS

