

MULTIPIPE

Multipipe Maxima LS Manifold 44-061xx


TECHNICAL DATA SHEET

Product Detail

Made from a quality stainless steel body and premium brass fixtures, all to a patented profile, the Maxima manifold is unique in the UK market. Benefiting up to 16 ports thanks to the increased bore size whilst keeping a smaller profile. All manifolds now come complete with Fill and drain points. Individual radiators can be balanced using the radiator. All manifolds are quality-checked and pressure-tested out of the factory. The factory is proud to be ISO9001 and ISO14001 certified.

Benefits

- 43% bigger bore
- Over 40% cost savings on large manifolds
- Halve your labour time by using a larger manifold
- Space saving by using a larger manifold

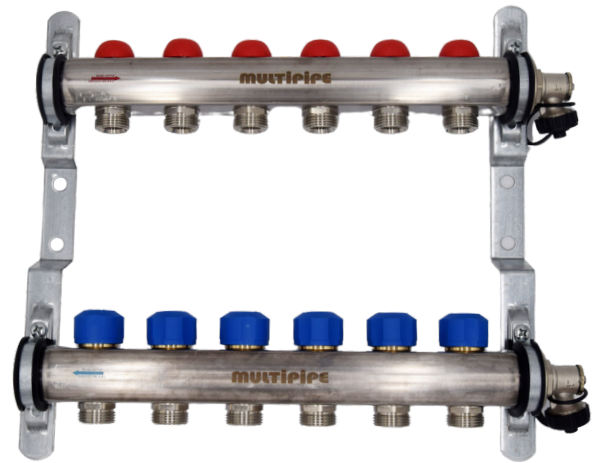

Features

- Premium and quality components
- Pressure gauge
- Automatic Airvent
- Reversible

Product Code (panel only)	44-061xx
Ports	2-16 ports
Material Body	1.4301 stainless steel
Manifold Connection	EN 16313 3/4" Eurocone
Maximum Temperature	60°C
Maximum Pressure	6 Bar
Actuator pin spring power (closed)	40N
Flowmeter	0-5 L/min
Thread Size	1" Female thread
Actuator Thread Size	M30 x 1.5mm


Supplementary Products



Multipipe Maxima LS Manifold 44-061xx

TECHNICAL DATA SHEET

Dimensions

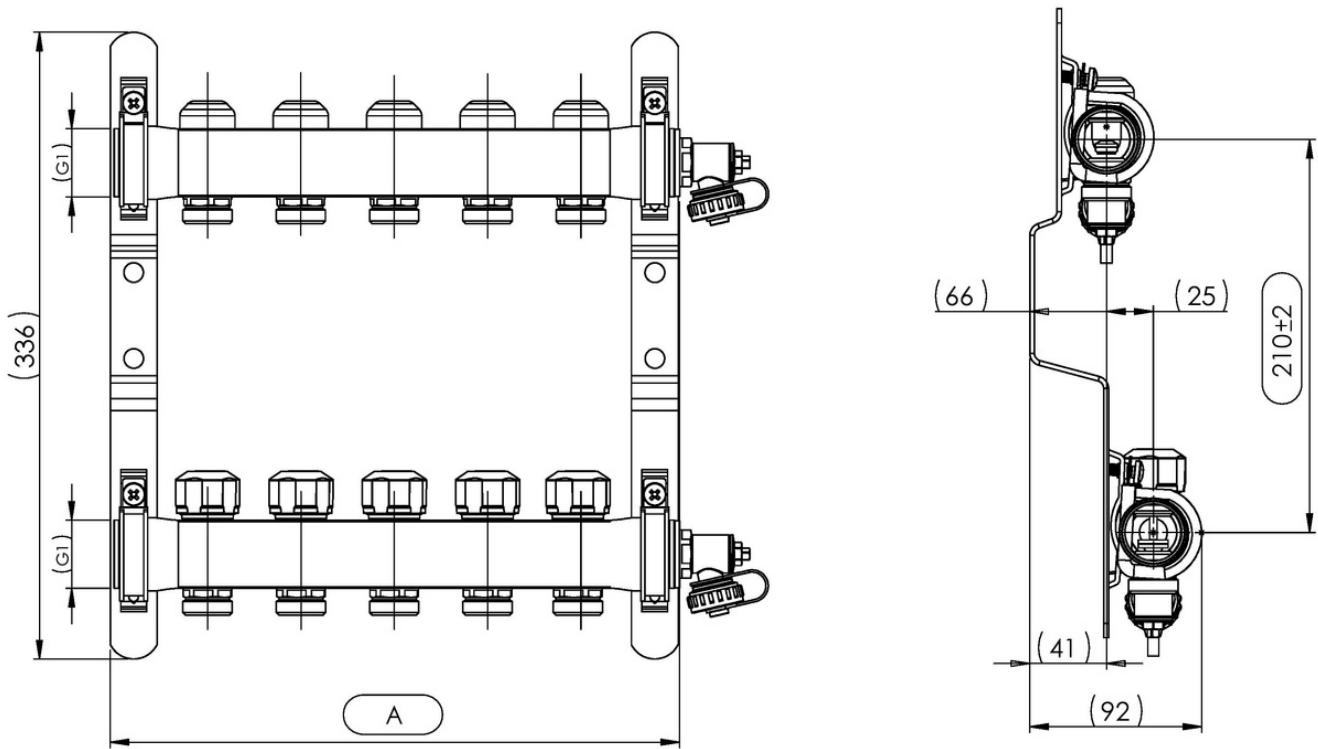

Underfloor Heating

Ports	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
A Dimension (mm)	195	245	295	345	395	445	495	545	595	645	695	745	795	845	895

*all dimension exclude valves, pump sets and working area around the manifold.