


CLIP-RAIL UNDERFLOOR HEATING SYSTEM

PRODUCT DETAIL

Multipipe Clip-Rail UFH system is normally supplied as part of a new build construction on the ground floor. Supplied with our MLC pipe, the pipework is clipped into a specially designed rail which can be fixed directly to the floor. Then either a 4:1 sand cement screed (typically) is added, but other screeds can be used, including Gyvlon Thermio Screed, the only BBA certified screed. Thanks to its unique makeup, it can be laid as low as 40mm. All insulation should be fitted in line with part L of the building regulations or at least to BS EN 1264 standard of 1.25 m²K/W.

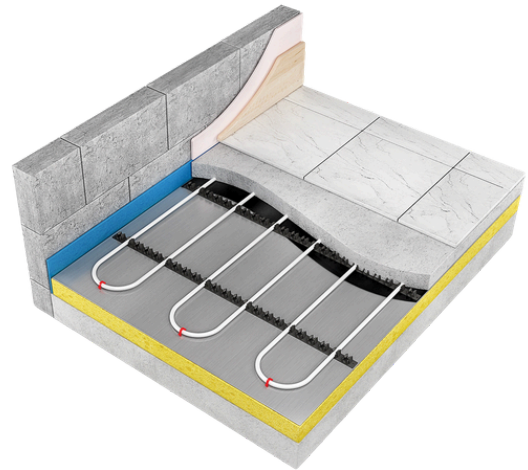

BENEFITS

- Ideal if insulation boards are not directly underneath
- Incorporates into a standard build construction
- Perfect for single person installs
- Perfect system for renewable heat sources
- Not easily damaged as it is made from high impact Polypropylene
- Made from 100% recycled plastic

FEATURES

- Self-adhesive strip
- Interlocking mechanism to extend rails and keep accurate centres
- Snappable every 200mm, no need for a cutter

EDGE INSULATION

PRODUCT CODE	10-50150
PRODUCT SIZE	150mm x 8mm
PRODUCT LENGTH	50m
APRON	Yes, mid position
MATERIAL	Polyethylene
SCORING	Yes, 5 sections at top 5mm

CLIP RAIL

PRODUCT CODE	10-20120
PIPE SIZES	16-20 mm
MATERIAL	Polypropylene
OVERALL LENGTH	1m
SECTION SIZE	5x200mm sections
PIPE SPACING	50mm
FIXING	Self-Adhesive

SUPPLEMENTARY PRODUCTS

